
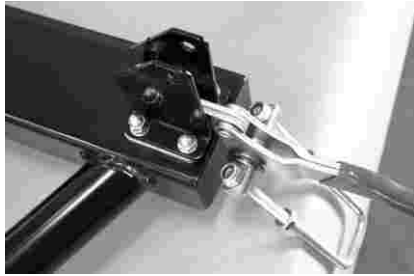


# Addendum: Latch assembly

## Hardware:

- A) Latch assembly
- B) Flat head screws/nuts/washers
- C) Metal lock holders
- D) Plastic slider block
- E) Allen head screws (black)/tooth washers
- F) Rubber stop block
- G) Allen screw/washer (black)
- H) Not used

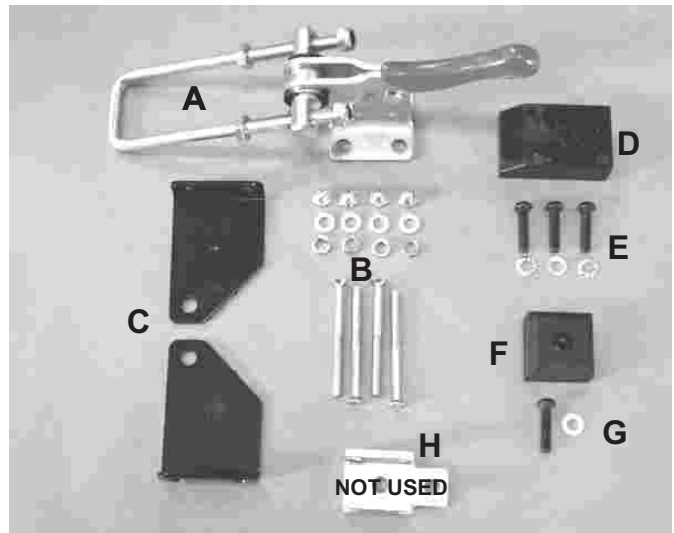

## Installation

1) Install the latch assembly (A) to the swing away portion of the bumper with the long flat head screws/washers/acorn nuts (B). Be sure to install the black lock holders (C) as shown. Note the direction the lock holders are facing. Minor adjustments can be made by loosening these fasteners and moving the latch assembly as needed.

2) Install the plastic slider block (D) using the black allen head screws with tooth washers (E). An allen wrench is included for the screws.

3) Install the rubber stop block to the fixed portion of the bumper (F) where the latch hooks for the swing away. Use the remaining allen head screw and tooth washer (G). Tighten with included allen wrench.