



Installation Instructions

769601

Door Stay for: YJ, TJ, JK All Years

Front doors only

Included:

- 2x Complete wire door stays
- 2x TJ/YJ mounting brackets
- 2x JK mounting brackets

2x JK Spacer plates

2x Plastic Collars

(Note: These may come installed in the wire)

PLEASE READ ALL INSTRUCTIONS AND BE SURE YOU HAVE A CLEAR UNDERSTANDING BEFORE BEGINNING THIS INSTALLATION

Overview


Installation of this product requires simple tools and replaces the factory door straps using the existing factory hardware. Be careful not to lose the factory hardware when it is removed as it is required to install the Door Stays and mounts. Once installed these stays will assist in holding the front doors of your Jeep open under most situations. Parking at extreme angles may affect the function of the stays, use caution. If removing the doors, disconnect by simply sliding the plastic bushing up and off of the steel mount.

NOTE: The amount of tension the stays provide can be adjusted if they become loose by carefully compressing the de-tint area of the wire with pliers. **DO NOT OVER COMPRESS.**

1 Begin by removing the factory footman loop and strap from the vehicle door. Save the hardware.

Now use the factory screws to install the new footman loop and stay assembly onto the vehicle door. Be sure the nuts shown at "A" below are facing away from the door surface.

For the JK, the straps cannot be removed and should be left in place with only the footman loop removed. Once the stay is installed you may choose to zip tie the strap/wiring to the stay.

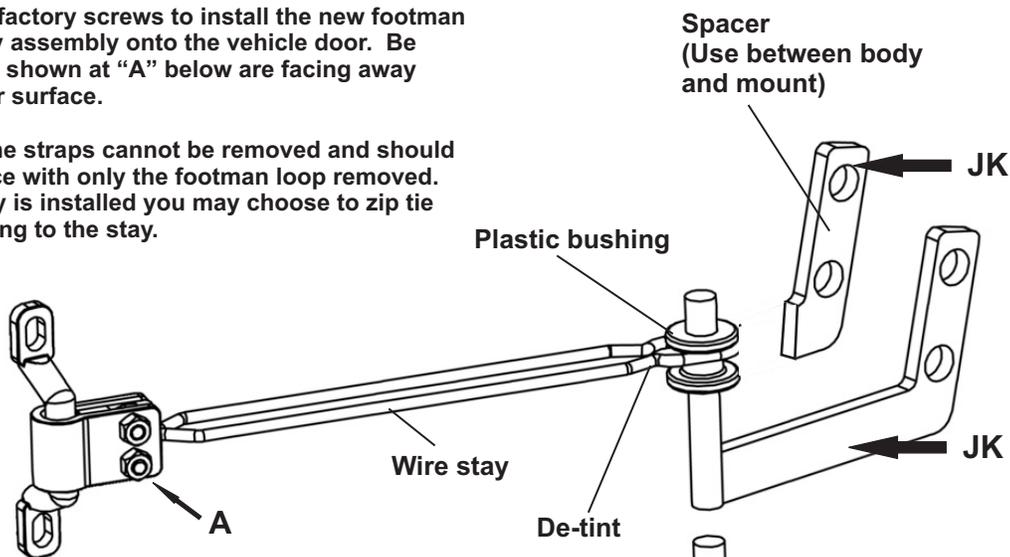

2 Remove the factory strap retainer under the dash of the vehicle and retain the fasteners.

Install the correct bracket based on your application (shown to the right) using the factory hardware.

NOTE: Be sure to use the provided spacer between the mounting bracket and the vehicle body on the JK application only.

3 Position the door and stay assembly so you can hook the plastic bushing onto the installed bracket as shown above.